


GS84 EPS GRANULATOR

The granulator GS84 is designed for granulating EPS-waste for reuse in block production.

Waste material is manually fed, or directly from a silo. The finished granules is discharged by an auger at the bottom of the granulator.

The GS84 is equipped with two slow-speed rotors to minimize dust development and secure a comparatively noiseless performance.

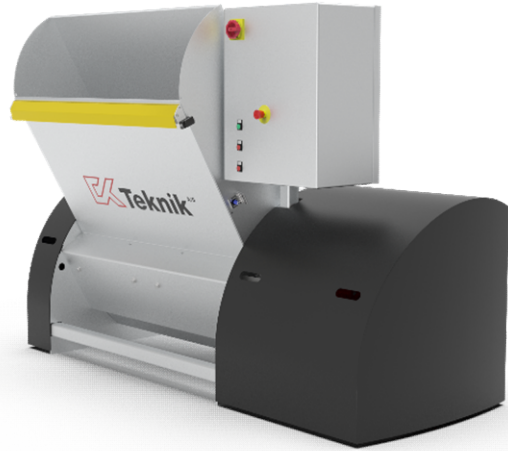

Technical data:

Electrical connection:	3 x 400/480V, 50/60Hz, 9 - 13 kW
Waste size max.:	1350mm x 350mm
Density:	10 - 55 g/l
Capacity:	10 - 20 m ³ /h (Depending on density/screen size)
Measurements (LxWxH):	2575mm x 1050mm x 2000mm
Pipe Connection:	Ø200

Features:

- Interchangeable sieves for the wanted material size.
- Screen Size 15 - 20 mm.
- By feeding from Silo, an additional star feeder is needed (Option)

